

Stora Rectangular LED pendant luminaire





STORA-P-LED 5200/840 OS-DA

Rectangular luminaire element with an opal acrylic glass panel mounted in a profile frame made of power-coated aluminium. The luminaire is suspended by a wire pendant with ceiling fixture and transparent connecting cable with rectangular powder-coated ceiling junction box. The cable length can be adjusted at the ceiling junction box, the steel wire can be steplessly height adjusted at the luminaire. At the top of the luminaire, the control gear is accommodated under a cover which can be removed for maintenance using a keyhole screw connection. The LED module is formed as a rectangular LED flat board. Luminaire with heat-resistant wiring. Homogeneous illumination of the light surface. Light colour 4000 K (840), dimmable. Protection rating IP20, safety class I.

Colour:
Frame - similar to RAL 9016 white silk matt

Lamps	Ballast	Prod. code
2xLED-M 14 W	LED Driver DALI	SPC0630024

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
3723	32	116

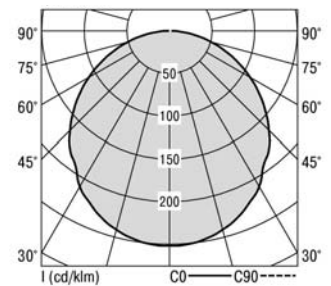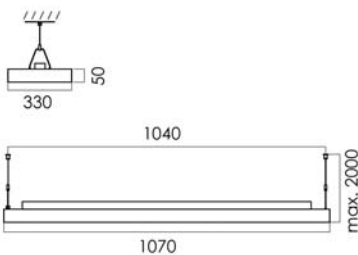

Dimens. [mm]			Weight [kg]	Photometric data		
L	B	H		Longitudinal UGR	Transverse UGR	LOR
1070	330	75	9,6	20.2	19.7	71.6 %

EEC A++ - A
Energy efficiency class scale A++ - E

Stora **Rectangular LED pendant luminaire**

